

Hyflon®



SOLVAY

asking more from chemistry®



Hyflon® PFA & MFA®

for Cryogenic Applications

**SPECIALTY
POLYMERS**

Hyflon® PFA and MFA® for Cryogenic Applications

Faced with the rising demand of the Oil & Gas industry to explore in more extreme regions such as deepwater and arctic areas, polymer technology must adapt and improve to meet performance requirements.

The increasing interest in Floating LNG (FLNG) is driving the development of several aerial cryogenic system that enable more conventional transfer of LNG on the open sea.

In this challenging scenario Solvay Solexis, one of the world's leaders in fluorinated materials, provides Hyflon® PFA and Hyflon® MFA®, that are a unique family of semi-crystalline melt-processable perfluoropolymers, that combine excellent mechanical characteristics with novel properties such as very cold temperature resistance, inherent flame resistance, chemical inertness, heat resistance, low surface energy, and exceptional dielectric properties.


Hyflon® resins are used in several Oil & Gas applications such as EM cables, metal tubing encapsulation, piping, tank linings, tower packing, valve linings and heater cables.

Hyflon® resins have been designed to retain their properties over a wide range of temperatures from cryogenic (-200 °C) to 250–260 °C.


Why Use Hyflon® in Cryogenic Applications?

- Lower thermal conductivity than nylon, down to -230 °C
- Lower specific heat than nylon, down to -250 °C
- Good flexibility and ductility down to -100 °C (lowest temperature tested)
- Mechanical properties and dimensional stability, from -200 °C to +260 °C
- Excellent long-term ageing resistance
- No plasticizer, no additives
- Intrinsic UV resistance

Thermal conductivity

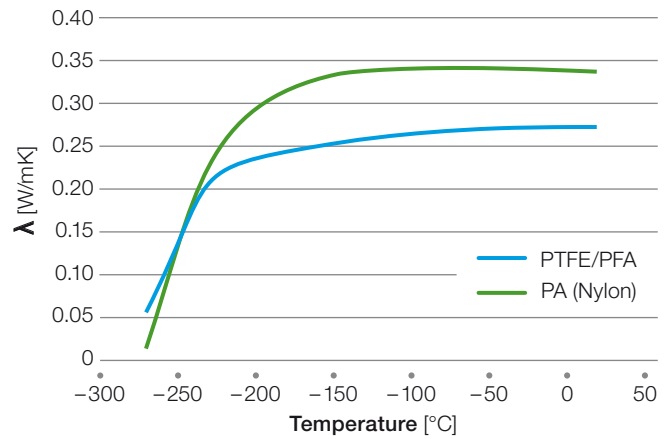

Specific heat

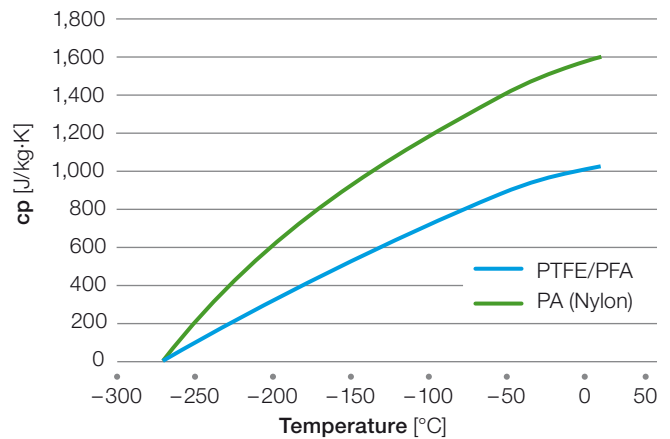

Hyflon® PFA M620

Sample Type IV (thickness: 1.5 mm) acc. ASTM D638

Temperature [°C]	E [MPa]	Stress at Break [MPa]	Strain at Break [%] (transverse)
23	465	35.6	281
0	609	39.6	258
-20	690	41.6	232
-50	960	44.4	182
-100	2,980	55.6	22.8

www.solvay.com

SpecialtyPolymers.EMEA@solvay.com | Europe, Middle East and Africa

SpecialtyPolymers.Americas@solvay.com | Americas

SpecialtyPolymers.Asia@solvay.com | Asia Pacific

Material Safety Data Sheets (MSDS) are available by emailing us or contacting your sales representative. Always consult the appropriate MSDS before using any of our products. Neither Solvay Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Solvay's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Solvay's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right. All trademarks and registered trademarks are property of the companies that comprise Solvay Group or their respective owners.

© 2013 Solvay Specialty Polymers. All rights reserved. R 09/2013 | Version 2.0 Brochure design by ahlersheinel.com

